What is claimed is:

A synchronization establishing and tracking circuit for a CDMA base station comprising:

a first spreading code generator generating a first spreading code sequence;

a first correlator calculating first correlation between said first spreading code sequence and a first quasi-coherent signal corresponding to a first received signal received by said CDMA base station;

a second spreading code generator generating a second spreading code sequence;

a second correlator calculating second correlation between said second spreading code sequence and a second quasi-coherent signal corresponding to a second received signal received by said CDMA base station; and

a phase determining circuit determining a first phase of said first spreading code sequence based on an added quasi-coherent signal to which said first and second quasi-coherent signals are added.

2. A synchronization establishing and tracking circuit according to claim 1, wherein said phase determining circuit includes:

a ranking portion determining a plurality

10

15

20

of target phases based on said added quasicoherent signal; and

a phase setting circuit setting said first phase to a selected phase selected from among said target phases.

3. A synchronization establishing and tracking circuit according to claim 2, wherein said ranking portion determines an order of priority for said target phases based on said added quasicoherent signal, and

wherein said phase setting circuit selects said selected phase in accordance with said order of priority.

4. A synchronization establishing and tracking circuit according to claim 2, wherein said ranking portion comprises:

a phase determining spreading code

5 generator generating a phase determining
spreading code sequence, wherein a phase of said
phase determining spreading code sequence is
sequentially shifted to one of candidate phases;

a phase determining correlator calculating

10 correlation between said phase determining spreading code sequence and said added quasi
coherent signal to determine added signal

correlation values respectively corresponding to said candidate phases;

- 15 a ranking circuit selecting said target phases based on said correlation values.
 - 5. A synchronization establishing and tracking circuit according to claim 1, further comprising:
 - a maximum correlation phase determining circuit determining a despreading phase based on said first correlation;
 - a despreading circuit despreading said first quasi-coherent signal to produce a despread signal using another spreading code sequence having said despreading phase; and
- detecting a synchronization of said first quasicoherent signal with said another spreading code
 sequence to output a synchronization informing
 signal informing said first spreading code

 15 generator of said synchronization, wherein said
 first spreading code generator fixes said first
 phase based on said synchronization informing
 signal such that said synchronization of said
 first quasi-coherent signal with said despreading


 20 spreading code sequence is established.
 - 6. A synchronization establishing and tracki η g

circuit according to claim 1, wherein said phase determining circuit determining a second phase of said second spreading code sequence based on said added quasi-coherent signal.

- 7. A synchronization establishing and tracking circuit according to claim 6, wherein said a phase determining circuit includes:
- a ranking portion which determines a plurality of target phases based on said added quasi-coherent signal; and
 - a phase setting circuit setting said first and second phases to a selected phase selected from among said target phases.
 - 8. A synchronization establishing and tracking circuit according to claim 7, wherein said ranking portion determines an order of priority for said plurality of target phases based on said added quasi-coherent signal, and

wherein said phase setting circuit selects said selected phase in accordance with said order of priority.

9. A synchronization establishing and tracking circuit according to claim 7, wherein said ranking portion comprises:

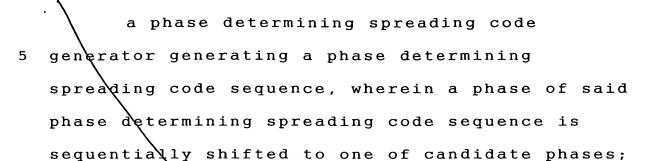

a phase determining correlator calculating

10 correlation between said phase determining

spreading code sequence and said added quasi
coherent signal to determine added signal

correlation values respectively corresponding to

different phases of said candidate phases;

a ranking circult selecting said target phases based on said correlation values.

10. A synchronization establishing and tracking circuit according to claim 1, further comprising:

a first maximum correlation phase determining circuit determining a first despreading phase based on said first correlation;

a first despreading circuit despreading said first quasi-coherent signal to produce a first despread signal using a third spreading code sequence having said first despreading phase;

a second maximum correlation phase determining circuit determining a second

25

despreading phase based on said second 15 correlation;

a second despreading circuit despreading said second quasi-coherent signal to produce a second despread signal using a fourth despreading spreading code sequence having said second despreading phase; and

a space diversity circuit identifying a direction of a mobile station transmitting at least one of said first and second received signals, based on said first and second despread signals.

11. A synchronization establishing and tracking circuit for a CDMA base station comprising:

a spreading code generator generating a spreading code sequence;

a correlator calculating correlation between said spreading code sequence and a quasi-coherent signal corresponding to a received signal received by said CDMA base station;

a ranking circuit storing a plurality of 10 ranked phases; and

a phase setting circuit setting said phase to a selected phase selected from among said plurality of ranked phases.

12. A synchronization establishing and tracking circuit according to claim 11, further comprising:

an adding circuit adding said quasi
5 coherent signal and at least one other quasicoherent signal to produce an added quasicoherent signal, wherein said other quasicoherent signal corresponds to one or more other
received signal received by said CDMA base

10 station, and

wherein said plurality of ranked phases are determined based on said added quasi-coherent signal.

13. A synchronization establishing and tracking method for a CDMA base station comprising:

generating a first spreading code sequence;
calculating first correlation between said
first spreading code sequence and a first quasicoherent signal corresponding to a first received

generating a second spreading code sequence;

signal received by said CDMA base station;

calculating second correlation between said second spreading code sequence and a second quasi-coherent signal corresponding to a second received signal received by said CDMA base

station;

producing an added quasi-coherent signal on which said first and second quasi-coherent signals are added; and

determining a first phase of said first spreading code sequence based on said added quasi-coherent signal.

14. A synchronization establishing and tracking method according to claim 13, further comprising:

determining a plurality of target phases based on said added quasi-coherent signal;

selecting a selected phase from among said plurality of target phases;

setting said first\phase to said selected phase.

15. A synchronization establishing and tracking method according to claim 14, wherein said selecting includes:

determining an order of priority for said target phases based on said added quasi-coherent signal; and

selecting said selected phase based on said order of priority.

16. A synchronization establishing and tracking

method according to claim 14, wherein said determining said plurality of target phases includes:

generating a phase determining spreading code sequence such that a phase of said phase determining spreading code sequence is sequentially shifted to one of candidate phases;

calculating correlation between said phase

10 determining spreading code sequence and said added quasi-coherent signal to determine added signal correlation values respectively corresponding to said candidate phases; and

selecting said target phases from among

15 said candidate phases based on said correlation values.

17. A synchronization establishing and tracking method according to claim 13, further comprising:

determining a despreading phase based on said first correlation;

despreading said first quasi-coherent signal to produce a despread signal using another spreading code sequence having said despreading phase;

detecting a synchronization of said first

10 quasi-coherent signal with said another spreading

code sequence to output a synchronization

informing signal indicative of said synchronization; and

fixing said first phase based on said

15 synchronization informing signal such that said synchronization of said first quasi-coherent signal with said another spreading code sequence is established.

18. A synchronization establishing and tracking method according to claim 13, further comprising:

determining a second phase of said second spreading code sequence based on said added semisynchronous.

19. A synchronization establishing and tracking method according to claim 18, further comprising:

determining a plurality of target phases based on said added quasi-coherent signal; and

- setting said first and second phases to a selected phase selected from among said ranked phases.
- 20. A synchronization establishing and tracking method according to claim 13, further comprising:

determining a first despreading phase based on said first correlation;

5 despreading said first quasi-comerent

signal to produce a first despread signal using a third spreading code sequence having said first despreading phase;

determining a second despreading phase 10 based on said second correlation;

despreading said second quasi-coherent signal to produce a second despread signal using a fourth spreading code sequence having said second despreading phase; and

- identifying a direction of a mobile station transmitting at least one of said first and second received signals based on said first and second despread signals.
 - 21. A synchronization establishing and tracking method for a CDMA base station comprising:

generating a spreading dode sequence;

calculating correlation between said

spreading code sequence and a quasi-coherent signal corresponding to a first received signal received by said CDMA base station;

storing a plurality of ranked phases; and setting said phase to a selected phase

- 10 selected from among said plurality of manked phases.
 - 22. A synchronization establishing and tracking

method according to claim 20, further comprising:

adding said quasi-coherent signal and at least one other quasi-coherent signal to produce

5 an added quasi-coherent signal, wherein said other quasi-coherent signal corresponds to one or more other received signal received by the CDMA station, and

wherein said plurality of ranked phases are 10 determined based on said added quasi-coherent signal.

(